

IAC

APROXIMACIÓN POR INSTRUMENTOS OACI



ICAO INSTRUMENT APPROACH

ELEV. AD: 3148

GUABITO
MARCO FIDEL SUÁREZ
CAT: A/B/C
VOR - A RWY 25

TWR: Marco Fidel Torre / Tower 118.2 MHz, APP: Cali Aproximación / Approach 119.1 MHz
Marco Fidel Tierra 121.6 MHz,

DECL/CLO
6° 1' W/24
VAR 0° 10' W/Año

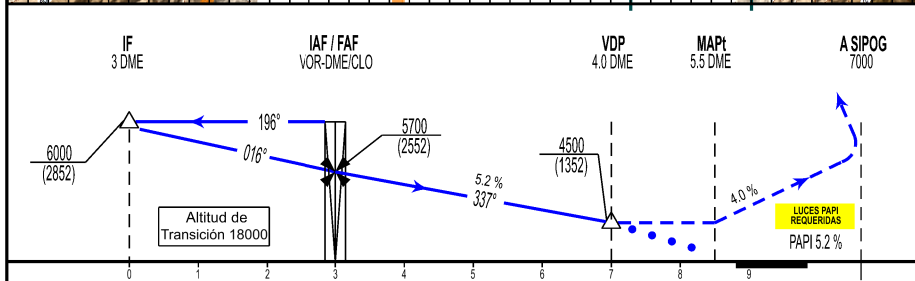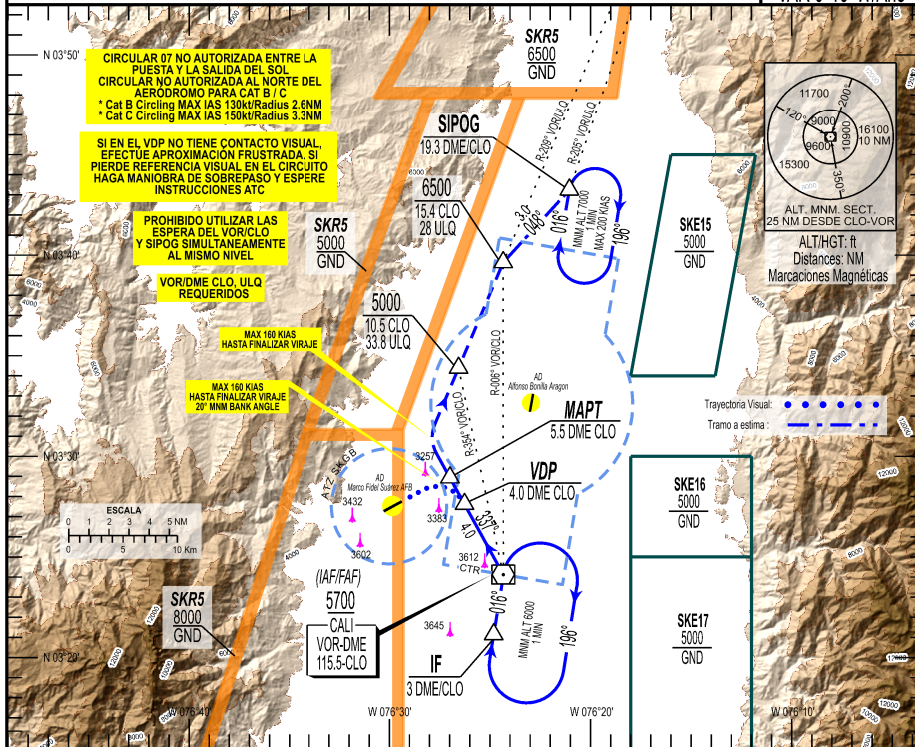

MISSED APPROACH: CROSSING MAPt TURN RIGHT TO INTERCEPT ULQ-VOR / RADIAL 209°, CLIMBING TO 6500 OR HIGHER, TOWARDS SIPOG HOLDING PATTERN AND 7000°. MAINTAIN MINIMUM PDG 4% UNTIL 5000FT, WAIT FOR ATC INSTRUCTIONS (MAX SPEED 160 KIAS UNTIL FINISHING TURN).

APP FRUSTRADA: CRUZANDO EL MAPt VIRE DERECHA EN ASCENSO PARA INTERCEPTAR RADIAL 209° DE ULQ VOR. EN ASCENSO PARA 6500 O SUPERIOR HACIA EL CIRCUITO DE ESPERA DE SIPOG Y 7000°, MANTENER MINIMO PDG 4% HASTA 5000 FT, ESPERE INSTRUCCIONES DEL CONTROL (VELOCIDAD MAXIMA 160KIAS HASTA TERMINAR EL VIRAJE).

	CAT A		CAT B		CAT C		ALTITUDE VS. DISTANCE VOR DME CLO				
	NMN AD: Distancias verticales en pies y VIS en metros						DISTANCIA NM	1	2	3	4
	OCA (H)	VISIBILIDAD	OCA (H)	VISIBILIDAD	OCA (H)	VISIBILIDAD	ALTITUD - PIES	5382	5063	4745	4430
	N/A						FAF A MAPt 5.5 NM				
	DIRECT										
CIRCLING	4100 (951)	4500	4100 (951)	4500	4430 (1281)	5000	GS (KT)	90	110	130	150
MAX. KTS	100		130		150		MIN-SEC	03:40	03:00	02:32	02:12
							FT/MIN	477	584	690	796